




Don't Just Seal It. ConSeal It!

Waterborne Epoxy Coating

APPLICATIONS

Two-part waterborne epoxy coating for concrete. Produces a hard polymer film that protects concrete from penetration when exposed to hydrocarbons and some chemicals.

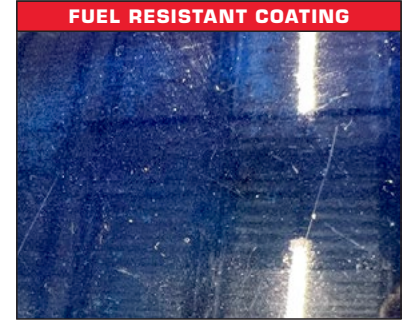

PERFORMANCE PROPERTIES

- Hard polymer after curing
- Can be applied with brush or roller
- Polymer film protects against water intrusion
- Excellent fuel resistance
- Indoor / outdoor application
- Tack free time: 60-75 minutes @ 72° F
- In service: 48 hours minimum
- Pot life after mixing: 4 hours
- Recommended coating thickness: 2-5 mils dry (5-11 mils wet)
- Coverage rate: 320 SF/Gal (2 mil dry), 210 SF/Gal (3 mil dry)

PERFORMANCE PROPERTIES

Color:	Blue
Solids content:	40%
Flash point:	>212° F
VOC:	78 g/l
Application Temperature:	50° - 110° F
Application humidity level:	< 80% RH
Clean-up:	Warm, soapy water while wet

DO NOT SUBJECT CS-90 TO FREEZING TEMPERATURES BEFORE USE.

DIRECTIONS FOR USE

Surface Preparation: CS-90 must be applied to clean, structurally sound, dry concrete free from surface contamination that may inhibit bonding to the concrete, i.e., laitance, dust, form release oils, previous coatings.

New Concrete Surfaces

- Cure concrete until 80% strength level is attained (typically 14-28 days).
- Remove laitance and roughen unusually slick concrete areas by acid etching, sand-sweeping, or shot-blasting.
- Rinse thoroughly with water and allow to dry.
- Remove loose aggregate.
- Dry overnight prior to coating.
- Fill voids and cracks in areas of need with a suitable epoxy filler.

Application Temperature & Curing Time Requirements

Color: Part A: White; Part B: Dark Blue

Mix Ratio A:B 2:1 (by weight)

Mix Instructions: Mix Part A and Part B individually and then add contents of Part B to Part A to yield 1 gallon. Mix well. Mix until a uniform light Blue color is homogeneously seen throughout the container.

Working Life: 3-4 hours, note that this product does not show an increase in viscosity at or near the end of its pot life. Product gloss will diminish greatly as the pot life is approached or passed. Total cure of coating is attained over a 7 - 10 day period.

Cure Time: 30-90 minutes, note that once the applied coating has transformed from an opaque blue liquid to a tacky, blue transparent film a subsequent coating application can commence.

Recommended Film Thickness: 2.0 – 5.0 mils dry (5 – 11 mils wet).

Coverage Rate: 320 ft²/gal yields 2 mil dry coverage | 213 ft²/gal yields 3 mil dry coverage

Clean Up: Clean equipment and spills while the product is wet for best results. Cleans up with warm, soapy water.

LIMITED WARRANTY

This information is presented in good faith, but we cannot anticipate all conditions under which this information and our products, or the products of other manufacturers in combination with our products, may be used. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each such product or product combinations for their own purposes. It is the users' responsibility to satisfy himself as to the suitability and completeness of such information for this own particular use. We sell this product without warranty, and buyers and users assume all responsibility and liability for loss or damage arising from the handling and use of this product, whether used alone or in combination with other products.

© 2022 CONCRETE SEALANTS, INC.

CONCRETE SEALANTS, INC. | 9325 STATE ROUTE 201, TIPP CITY, OH 45371, USA | WWW.CONSEAL.COM

USA CANADA +1.800.332.7325 INTERNATIONAL +1.937.845.8776

VERSION: 7-APR-2022



CONCRETE SEALANTS, INC.
ISO 9001:2015 REGISTERED