


Waterborne PSA Surface Primer Bonding Sealants to Concrete, Plastic and Metal Surfaces

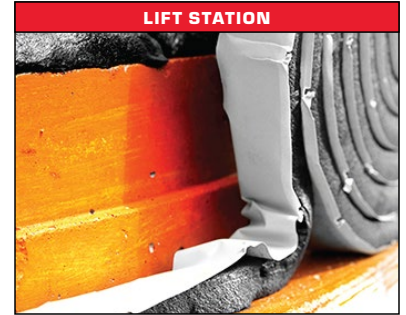

PRODUCT APPLICATIONS

For use on concrete, plastic and metal surfaces, ConSeal CS-75 enhances the bonding between preformed sealants and concrete surfaces aiding in the installation process. Conveniently applied at the job site, CS-75 improves adhesion of the sealant to the concrete.

PHYSICAL PROPERTIES

Description	CS-75
Color	Bright Orange
% Solids	32% minimum
Flash Point	212°F (100°C) minimum
Weight Per Gallon	8.5 lbs./gal
Dry Time @ 77°F (25°C)	10 minutes
Dry Time @ 40°F (4°C)	60 minutes
Clean Up	Soap and Water
Coverage Per Gallon	Approximately 250–300 square feet
Appropriate Substrates	Concrete, Plastic, and Metal
Min. Storage Temperature	40°F (4°C), Product must not be allowed to freeze
Min. Application Temperature	40°F (4°C), Remove frost from concrete surface before applying
Surface When Dry	Tacky

DO NOT SUBJECT CS-75 TO FREEZING TEMPERATURES.

DIRECTIONS FOR USE

Surface Preparation: The concrete must be clean and free from dust, dirt, grease and debris before application of CS-75. Inspect surface for soundness. Repair or remove any surface irregularities and loose concrete, using an approved crack filling method on static hairline cracks. When the surface is clean, sound and dry, proceed with primer application.

Application: CS-75 is a waterborne primer that dries tacky and must be applied at the time of the installation. Apply an even coating of the primer to the desired concrete surface and allow it to dry. A second coat may be needed if there are any surface voids noticed or the concrete surface appears to have any sections that are uncoated. Once the surface is dry, apply the sealant to the coated surface. Replace the lid on the primer immediately after use.

Reference Installation Instructions for “Primers” for more detailed instructions.

LIMITED WARRANTY

This information is presented in good faith, but we cannot anticipate all conditions under which this information and our products, or the products of other manufacturers in combination with our products, may be used. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each such product or product combinations for their own purposes. It is the users' responsibility to satisfy himself as to the suitability and completeness of such information for this own particular use. We sell this product without warranty, and buyers and users assume all responsibility and liability for loss or damage arising from the handling and use of this product, whether used alone or in combination with other products.

© 2026 CONCRETE SEALANTS, INC.

CONCRETE SEALANTS, INC. | 9325 STATE ROUTE 201, TIPP CITY, OH 45371, USA | WWW.CONSEAL.COM

USA | CANADA | +1.800.332.7325 | INTERNATIONAL | +1.937.845.8776

VERSION: 14-SEPTEMBER-2026



CONCRETE SEALANTS, INC.
ISO 9001:2015 REGISTERED